


# TOGGLE SWITCH

## WIRING FOR ONE MOTOR AND ONE TOGGLE SWITCH


- **NOTICE:** For installation by a qualified electrician in accordance with national and local electrical codes, and the following instructions.
- **CAUTION:** RISK OF ELECTRICAL SHOCK. Disconnect power before installing. Never wire energized electrical components.
- Select conductors having 90°C or higher rated insulation having sufficient ampacity in accordance with the 60°C column of National Electrical Code® table 310-16 or Canadian Electrical Code Table 2.
- Terminal capacity: #14 AWG to #10 AWG
- Strip conductors using strip gage on switch body. **DO NOT USE TIN CONDUCTORS.**

### ⚠ **WARNING:**

- **DO NOT** wire more than one operator to a single pole switch. A second operator can be wired to the second pole of a double pole switch.
- **DO NOT** connect two switches to an operator without a relay.

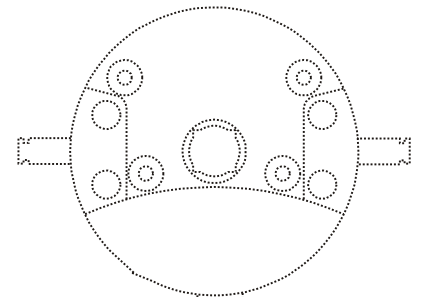

**Power from wall**

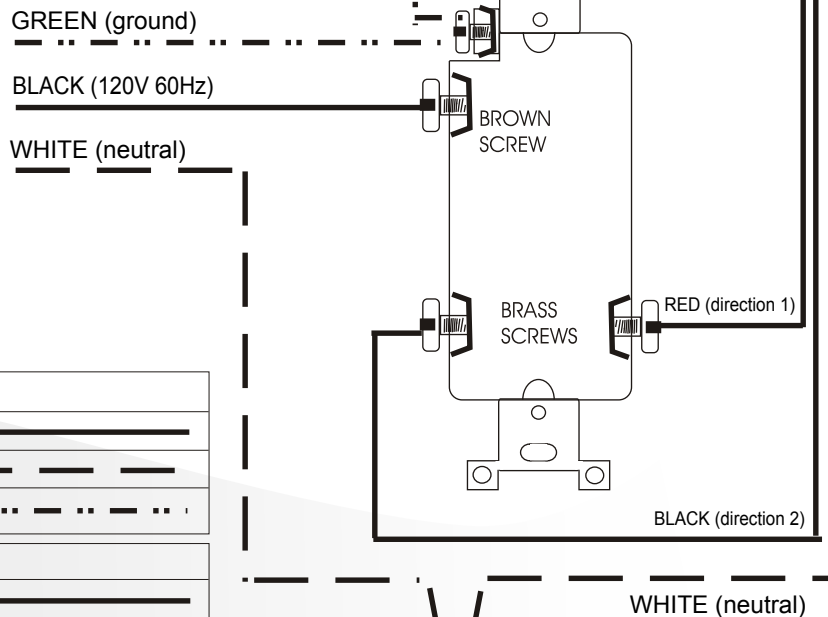

Power in		
Hot	Black	—————
Neutral	White	- - - - -
Ground	Green	- · - · - · - · - · - ·

Motor Leads		
Direction 1	Red	—————
Direction 2	Black	—————
Neutral	White	- - - - -
Ground	Green	- · - · - · - · - · - ·